



ELECTRICAL SPECIFICATIONS	
Nominal Voltage	76.8V
Working Voltage	64.8V-87.6V
Nominal Capacity	105Ah
Enclosure Protection	IP67
Storage Temperature	34°F-113°F
Energy	8,064Wh
Capacity @ 25A	252 min
Self-Discharge	1%-3% Per Month
Cycle Life	4000 cycles
Designed Lifespan	10 years



DIMENSIONAL SPECIFICATIONS	
76.8V 105Ah	
*Measured at the maximum outer points.	

MECHANICAL SPECIFICATIONS	
Dimensions (LxWxH)	29.7"x12.53"x10.2"
Weight	158.7 lbs
Case Material	Steel
Terminal Type	M8
Chemistry	Lithium Iron Phosphate
Shipping Classification	UN 3480, Class 9
Cells	24

SAFETY & FEATURES	
Pack Under / Over Voltage	Yes
Short Circuit/Over Current	Yes
Under/Over Temperature	Yes
Bluetooth Monitoring	Yes
Sleep Mode	Yes
Dashboard Switch	Yes
Series/Parallel Connectable	NO
Cell Certification	UL1642
Battery Certifications	UN38.3, MSDS

CHARGE SPECIFICATIONS	
Recommended Charge Current	<52A
Recommended Charge Voltage	61V-87.6V
BMS Charge Voltage Cut-Off	87.6V
Charge Temperature	32°F-149°F
Reconnect Voltage	82.8V
Cell Balancing	81.6V-87.6V
Charge Time @ 20A	~5.5 hrs

DISCHARGE SPECIFICATIONS	
Max Continuous Discharge Current	200A
Max Discharge (180S)	300A
Max Discharge (30S)	400A
Max Discharge (3S)	600A
BMS Discharge Voltage Cut-Off	60V
Discharge Temperature	-4°F-167°F
Recovery Voltage	64.8V

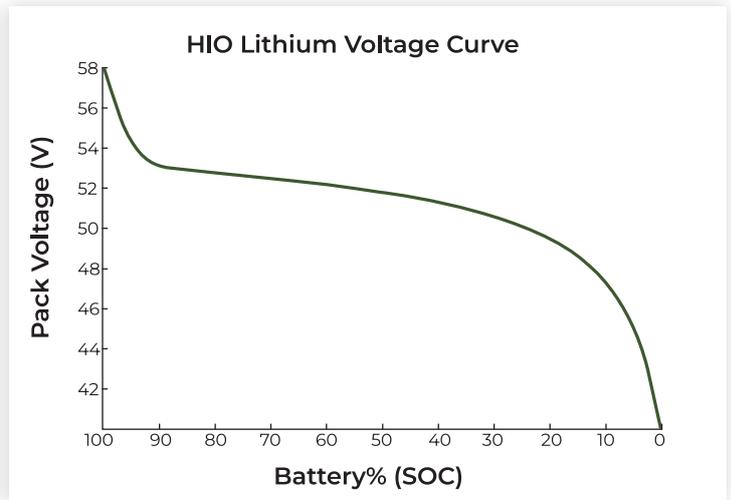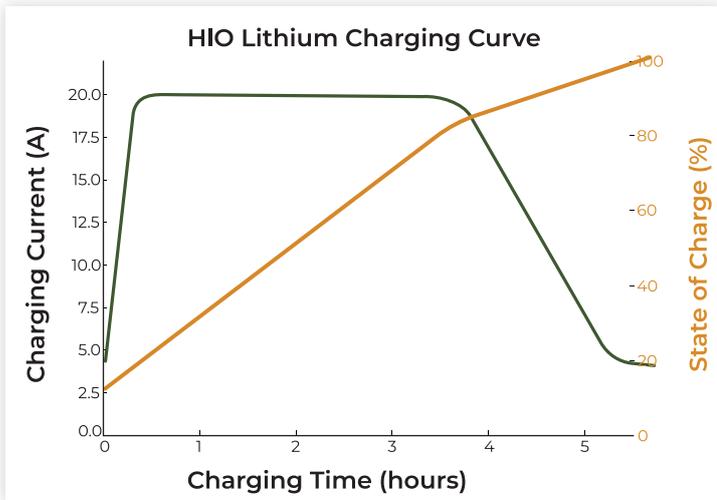

320 London Rd, Delaware,
 OH 43015
 +1 (626) 412-7068